

Práctica 3 (b):

Estimación de la Temperatura de superficie: Ecuación Monocanal

Sensores Remotos, Facultad de Ciencias Exactas - UNCPBA

Tandil, 21 de octubre de 2014

Dr. Raúl Rivas (Titular de la cátedra)


rrivas@rec.unicen.edu.ar

Dr. Facundo Carmona (profesor suplente)

facundo.carmona@rec.unicen.edu.ar

Temperatura de brillo

La determinación de la **temperatura de la superficie** terrestre se realiza a partir de las medidas de la radiación terrestre que le llegan al satélite después de atravesar la atmósfera.

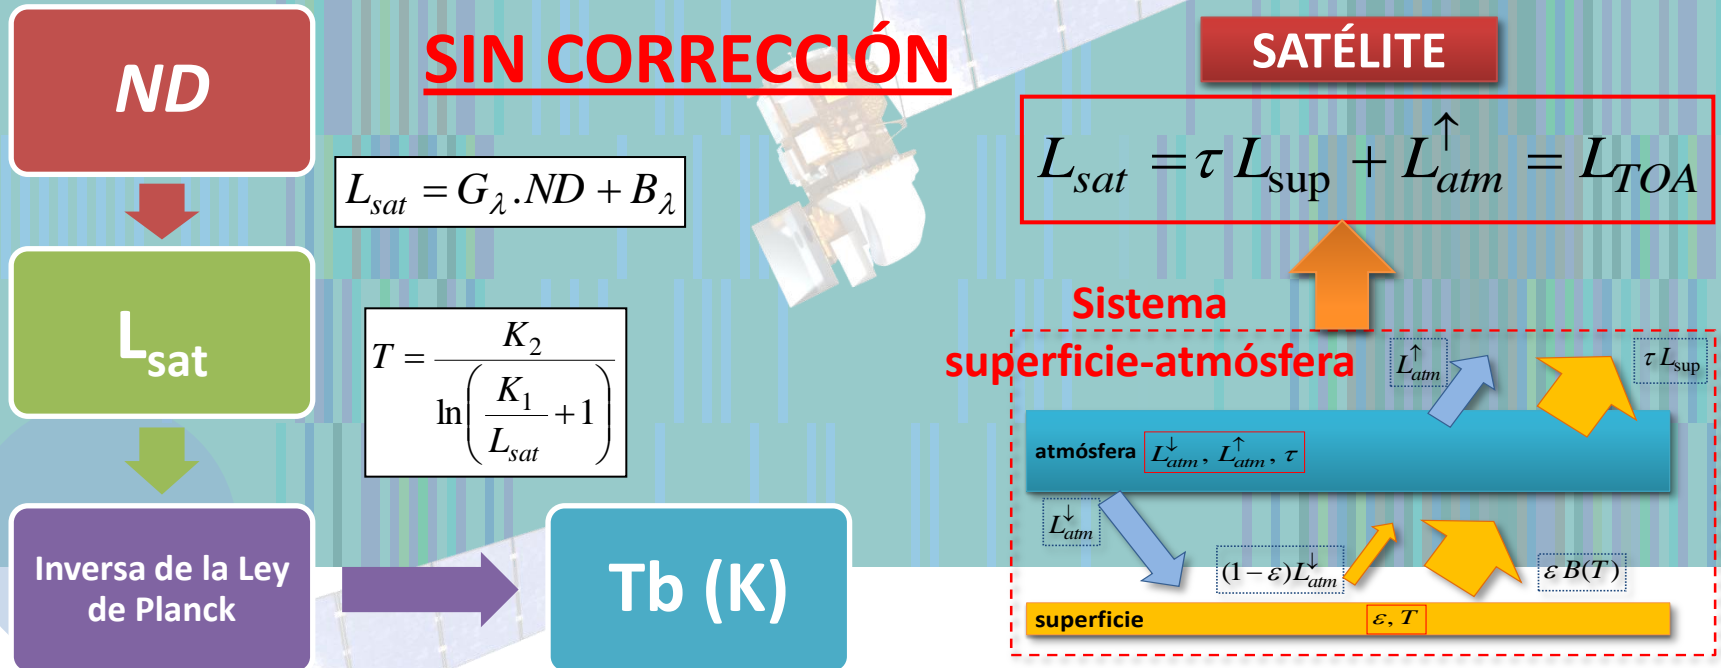

Tb nos da información preliminar.

Tb \neq Tsup -> CORRECCIÓN ATMOSFÉRICA



Ejercicio: Temperatura de brillo

1) Imagen en ND. Hacer:

$$L_{sat} = G_{\lambda} \cdot ND_{\lambda} + B_{\lambda} \quad (0.000334 * \mathbf{b10} + 0.1)$$

2) Imagen en radiancia. Llevar a Tb(k) (Inversa ley de Planck)

$$T = \frac{K_2}{\ln\left(\frac{K_1}{L_{sat}} + 1\right)}$$

$$1321.08 / \text{alog}((774.89 / \mathbf{b10}) + 1)$$

Ejercicio: Corrección Monocanal

Modelos de transferencia radiativa

$$L_{atm}^{\downarrow}, L_{atm}^{\uparrow}, \tau$$

<http://atmcorr.gsfc.nasa.gov/>

MODTRAN 1-4 (5) (1989-actualidad): Moderada resolución espectral 1-0,1 cm⁻¹)

(1) $L_{sat} = G_{\lambda} \cdot ND_{\lambda} + B_{\lambda}$ (0.000334 * **b10** + 0.1)

(2)

$$B(T) = \frac{\left[\frac{(L_{sat} - L_{atm}^{\uparrow})}{\tau} - (1 - \varepsilon)L_{atm}^{\downarrow} \right]}{\varepsilon}$$

$$L_{atm}^{\downarrow}, L_{atm}^{\uparrow}, \tau$$

$$\varepsilon = \varepsilon_v P_v + \varepsilon_s [1 - P_v]$$

$$P_v = \left(\frac{NDVI - NDVI_{min}}{NDVI_{max} - NDVI_{min}} \right)^2$$

(3)

$$T = \frac{K_2}{\ln \left(\frac{K_1}{B(T)} + 1 \right)}$$

$$1321.08 / \text{alog}((774.89 / \mathbf{b10}) + 1)$$

PARA LANDSAT PODEMOS UTILIZAR MODTRAN ONLINE!!!

<http://atmcorr.gsfc.nasa.gov/>

Barsi *et al.* (2003) Y (2005)

Year: <input type="text"/>	Month: <input type="text"/>	Day: <input type="text"/>
GMT Hour: <input type="text"/>	Minute: <input type="text"/>	
Latitude: <input type="text"/> <small>+ is North, - is South</small>	Longitude: <input type="text"/> <small>+ is East, - is West</small>	
<input type="radio"/> Use atmospheric profile for closest integer lat/long help		
<input type="radio"/> Use interpolated atmospheric profile for given lat/long help		
<input type="radio"/> Use mid-latitude summer standard atmosphere for upper atmospheric profile help		
<input type="radio"/> Use mid-latitude winter standard atmosphere for upper atmospheric profile help		
<input type="radio"/> Use Landsat-8 TIRS Band 10 spectral response curve		
<input type="radio"/> Use Landsat-7 Band 6 spectral response curve		
<input type="radio"/> Use Landsat-5 Band 6 spectral response curve		
<input type="radio"/> Output only atmospheric profile, do not calculate effective radiances		
Optional: Surface Conditions <small>(If you do not enter surface conditions, model predicted surface conditions will be used. If you do enter surface conditions, all four conditions must be entered.)</small>		
Altitude (km): <input type="text"/>	Pressure (mb): <input type="text"/>	
Temperature (C): <input type="text"/>	Relative Humidity (%): <input type="text"/>	
Results will be sent to the following address:		
Email: <input type="text"/>		
<input type="button" value="Calculate"/>		
<input type="button" value="Clear Fields"/>		



$$L_{atm}^{\downarrow}, L_{atm}^{\uparrow}, \tau$$



Landsat-7 ETM+ Bands (μm)			Landsat-8 OLI and TIRS Bands (μm)		
			30 m Coastal/Aerosol	0.435 - 0.451	Band 1
Band 1	30 m Blue	0.441 - 0.514	30 m Blue	0.452 - 0.512	Band 2
Band 2	30 m Green	0.519 - 0.601	30 m Green	0.533 - 0.590	Band 3
Band 3	30 m Red	0.631 - 0.692	30 m Red	0.636 - 0.673	Band 4
Band 4	30 m NIR	0.772 - 0.898	30 m NIR	0.851 - 0.879	Band 5
Band 5	30 m SWIR-1	1.547 - 1.749	30 m SWIR-1	1.566 - 1.651	Band 6
Band 6	60 m TIR	10.31 - 12.36	100 m TIR-1	10.60 - 11.19	Band 10
			100 m TIR-2	11.50 - 12.51	Band 11
Band 7	30 m SWIR-2	2.064 - 2.345	30 m SWIR-2	2.107 - 2.294	Band 7
Band 8	15 m Pan	0.515 - 0.896	15 m Pan	0.503 - 0.676	Band 8
			30 m Cirrus	1.363 - 1.384	Band 9

